

Order Code: 100015010

Active SoundBar System SP-AS

High-end SoundBar System extends display capabilities

The top- or bottom-mounted speaker system delivers superior sound quality, combined with a MultiSync® C431, C501 or C551 display. The result is sound and vision excellence.

The speaker's superior sound quality extends the display capabilities making the combination ideal for video conferencing in corporate office and educational environments delivering audio support for video playback in a variety of applications such as meetings and conferencing, product presentations and at the point of sale.

Choose to mount the SoundBar directly against the display via the optional VESA-bracket or enjoy the flexibility to position the SoundBar elsewhere, on a sideboard or mounted on a wall using the integrated wall-bracket.


SP-AS MOUNTED TO NEC MULTISYNC® C431



Delivering Genuine Benefits

- **Best of audio and vision** – The ultra-low distortion speakers deliver excellent speech intelligibility, seamlessly combining audio and visual excellence.
- **Excite with clarity** – wide dispersion extends the sweet spot to anywhere in the room, transmitting the spoken word with perfect clarity to the participants of web or telephone conferences and remote meetings.
- **Universal mounting approach** – maximum installation flexibility with different brackets available – a wall mount and an optional VESA-mount
- **Sophisticated engineering with crisp audio** – the solid MDF cabinet effectively minimises potential resonances and interactions with the loudspeaker.
- **Mission-critical 24/7 ready operation** – with reliable, industry grade components and NEC trusted performance.
- **A commitment to quality** – 3 years warranty to match the display warranty and meet long-term demands ensuring peace of mind.

Technical Drawings

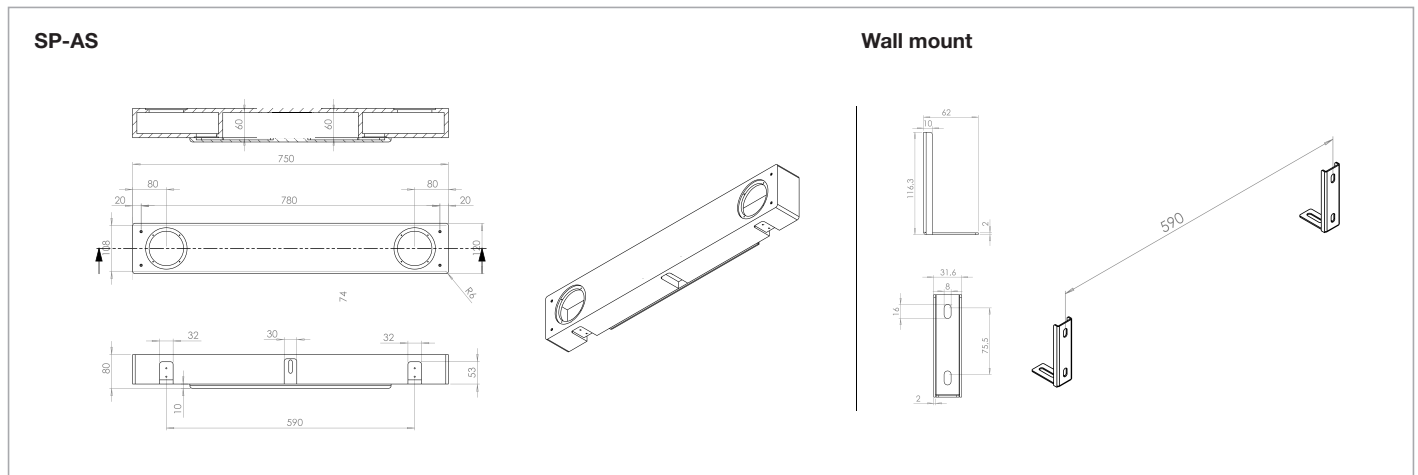

Technical Specifications

Order Codes	
SP-AS	100015010
MAXIMUM INPUT	
Short Term Power	100 W (Maximum)
Long Term Power	40 W (Maximum)
RATED SPEAKER IMPEDANCE	8 Ohm
FREQUENCY RESPONSE RANGE	70 Hz to 15 kHz
SOUND PRESSURE LEVEL	82.1 dB (2.83 V)
NOMINAL COVERAGE PATTERN (H X V)	90°
RECOMMENDED AMPLIFIER	AV-230 included, 2x30 W
DIMENSIONS (W x H x D)	
Speaker Only	750 x 120 x 86 mm
WEIGHT	
Speaker Only	3.9 kg
SUPPORTED NEC HARDWARE	
Large Format Displays	MultiSync® C431, C501, C551
Mounting Solutions	Wall mount included; additional VESA-mount available
SHIPPING CONTENT	Soundbar with integrated amplifier, 3.5mm mini jack, wall mount including screws
WARRANTY	3 years
For additional pictures and Solutions overview, Visit www.nec-display-solutions.com for details.	

NEC Display Solutions Europe GmbH
Landshuter Allee 12-14, D-80637 München
infomail@nec-displays.com
Phone: +49 (0) 89 99 699-0
Fax: +49 (0) 89 99 699-500
www.nec-display-solutions.com